



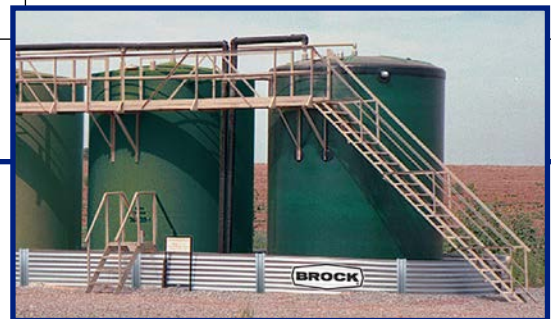


BROCK HAS THE RIGHT SIZE AND SHAPE FOR YOUR INSTALLATION

Configuration	Sidewall Height	Range of Capacities & Sizes
 <p>Round Diameters range from 15 to 60 feet (4.6 to 18.3 m)</p>	22- to 44-inch (55.9- to 111.8-cm)	Minimum of 1,771 gallons (42 barrels)
 <p>Square Sidewall sections are 112.5 inches (285.8 cm) long – minimums given are for a square 112.5 x 112.5 [285.8 x 285.8 cm] (larger units available)</p>	22-inch (55.9-cm) 36-inch (91.4-cm) 44-inch (111.8-cm)	Minimum of 890 gallons (21 barrels) Minimum of 1,596 gallons (38 barrels) Minimum of 2,034 gallons (48 barrels)
 <p>Rectangle Sidewall sections are 112.5 inches (285.8 cm) long – minimums given are for a unit one section wide by three sections long (larger units available)</p>	22-inch (55.9-cm) 36-inch (91.4-cm) 44-inch (111.8-cm)	Minimum of 2,670 gallons (63 barrels) Minimum of 4,788 gallons (114 barrels) Minimum of 6,102 gallons (144 barrels)
 <p>Oblong Diameters range from 15 to 60 feet (4.6 to 18.3 m) and lengths from 24 to 135 feet (7.3 to 41.2 m)</p>	22- to 44-inch (55.9- to 111.8-cm)	Minimum of 3,188 gallons (76 barrels)
<p>NOTE: All capacities are dependent on dimensions and height and are based on varying amounts of embedment and one-inch freeboard.</p>		



BROCK INDUSTRIAL SYSTEMS
A Division of CTB, Inc.
A Berkshire Hathaway Company
Phone: +1 574.658.4191
www.brockindustrial.com
Email: sales@brockgrain.com